


Fusion Round 240

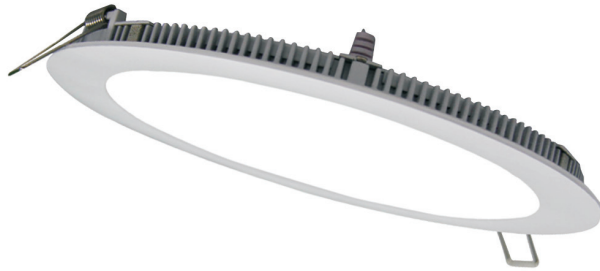

FEATURES

- 40,000 hours of operation
- Energy efficient
- No start-up time or flickering
- Low profile
- 120 degree beam angle
- Tridonic Driver as standard
- No unwanted LED spots
- Maintenance-free

ALL MODELS

- 240VAC 50HZ input (198-264VAC and over voltage protection)
- Mounting: recessed
- Matt white trim

LUMINAIRE CONSTRUCTION


- Die-cast aluminium construction
- Opal acrylic diffuser and LGP
- Spring clips

OPTIONS

- Dimmable: Switch DIM, 1-10V
- Trim colour options (MOQ's apply)
- CRI 90
- Cyanosis observation approved models

SUGGESTED APPLICATIONS

- Childcare centres
- Bathrooms
- Bedrooms
- Kitchens
- Living areas
- Medical facilities
- Office spaces
- Schools
- Walkways and stairwells

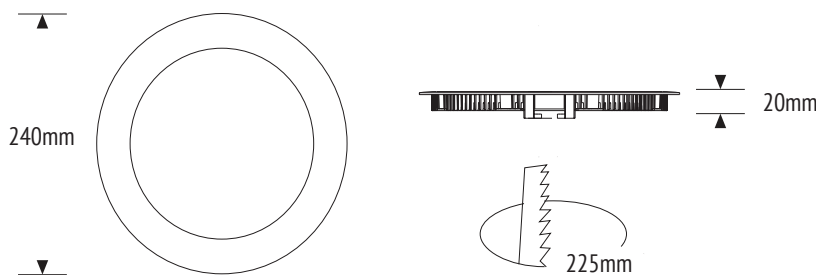

Model	Light Source/Lamp	Lumen Luminaire (lm)	Power Lamp (W)	Power Luminaire (W)	Colour Temp (°K)	Colour Rendering Index (CRI)	Power Factor	LED Qty	LED Type	LED Brand	IP Rating	Dimensions (mm)		Weight (kg)
												Ø	H	
LEDP14W-240-830	LED	1120	14	16	3000	>80	0.93	81	SMD2835	Epistar	IP20	240	20	0.66
LEDP14W-240-840	LED	1270	14	16	4000	>80	0.90	81	SMD2835	Epistar	IP20	240	20	0.66
LEDP14W-240-850	LED	1230	14	16	5000	>80	0.93	81	SMD2835	Epistar	IP20	240	20	0.66



3 year warranty. Refer to warranty card for more information.

Due to continual improvement through research and development, El-Electric reserves the right to change specifications without notice. Must be installed by a Licenced Electrician.